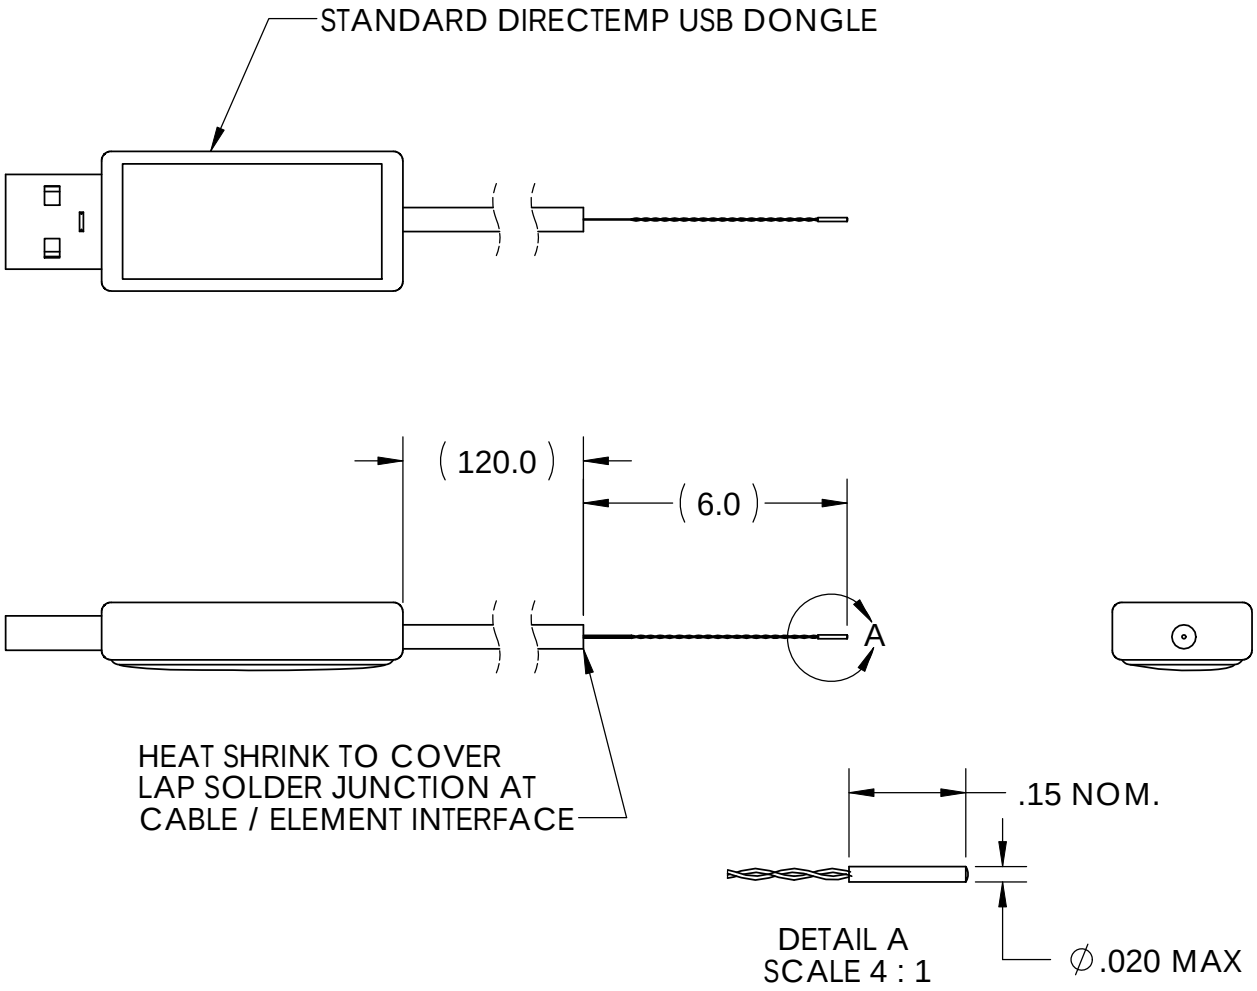

RoHS COMPLIANT

ELECTRICAL CHARACTERISTICS:

R25C=10K OHMS NOMINAL
RT CURVE Z, NTC=-4.4%/C @ 25C

OPERATING TEMPERATURE: -20C TO 60C
STORAGE TEMPERATURE: -20C TO 65C

MECHANICAL CHARACTERISTCS:

LEADS:
#38 AWG COPPER CONDUCTOR LAP
SOLDERED TO #22AWG BLACK PVC CABLE

HOUSING:
POLYIMIDE TUBE

NOTES:

	INITIAL	DATE
DRAWN	BC	7/23/2010
ENG APPR.	Jay Kochaver 07 23, 2010	
MAT APPR.	Jul 26, 2010	
Q.A. APPR.	Jul 29, 2010	

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/8
.X ±0.1
.XX ±0.02
.XXX ±0.005

QUALITY THERMISTOR, INC
2108 CENTURY WAY
BOISE, ID 83709

QTI PART NUMBER: **DTU6002-006**

REV: -

SIZE: A

DWG. NO. DTU6002-006.SLDDRW

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1

DATE	REVISION	INITIAL
7/23/10	-	BC

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUALITY THERMISTOR, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUALITY THERMSITOR, INC. IS PROHIBITED.

5 4 3 2 1